

AHComputing Roofing Estimates

Powered by AI Roof Analysis
hire.ahcomputing.com

ROOFING
ESTIMATE

BILL TO

Property Owner

1261 20th Street
Newport News, VA 23607

Estimate # RE-202605-9725
Estimate Date 05-08-2026
Valid Until 05-22-2026

Roof Area 6118 sqft	Squares 61.2	Eave Length 247 Inft	Ridge/Hip 48 Inft	Roof Type Hip	Pitch low (4/12)	AI Confidence High
---------------------	--------------	----------------------	-------------------	---------------	------------------	--------------------

QTY	UNIT	DESCRIPTION	UNIT PRICE	AMOUNT
208	bundles	Architectural Roofing Shingles	\$48.00	\$9,984.00
18	rolls	Roofing Underlayment (15lb felt, 400 sqft/roll)	\$75.00	\$1,350.00
741	sqft	Ice & Water Shield (eave protection)	\$0.75	\$555.75
247	Inft	Drip Edge / Eave Trim	\$1.50	\$370.50
48	Inft	Ridge Cap Shingles (ridge + hips)	\$3.50	\$168.00
6	Inft	Valley Flashing	\$4.00	\$24.00
153	lbs	Roofing Nails	\$3.50	\$535.50
61.2	squares	Tear-Off & Disposal (existing roof removal)	\$65.00	\$3,978.00
61.2	squares	Installation Labor	\$150.00	\$9,180.00

Subtotal \$26,145.75

Sales Tax (8%) \$2,091.66

TOTAL (USD)	\$28,237.41
-------------	-------------

Estimator Notes: Solar API data: 6 roof segments, avg pitch 18.1° (4/12), imagery from 2017-05. Quality: HIGH.

Terms & Conditions: This estimate is valid for 30 days. A 50% deposit is required to begin work. Final invoice may vary +/-10% based on field conditions. All work performed to local building code. Permit costs not included.


Contractor Signature: _____

Customer Signature: _____

Roof Analysis & Calculation Detail

Estimate RE-202605-9725 | 1261 20th Street, Newport News, VA 23607

SATELLITE IMAGE

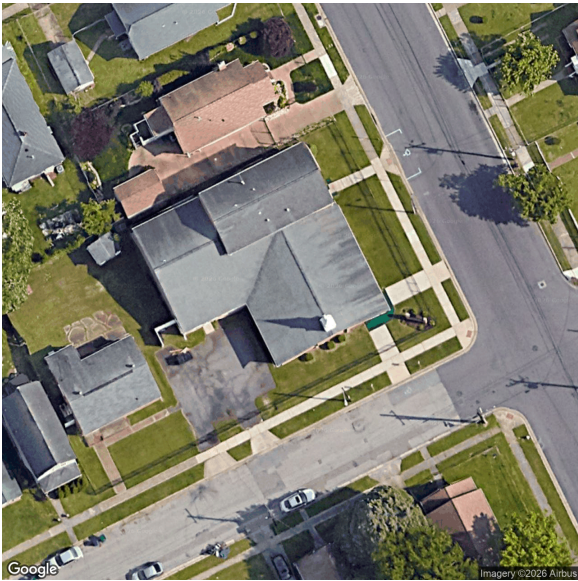

Zoom 20 | 0.0596 m/px
640x640px | Google Maps Static API
Lat 36.98456

ROOF PLANE BREAKDOWN

PLANE	FOOTPRINT	PITCH	MULT	ADJ AREA
Northeast-facing slope	1,366 sqft	4/12	x1.0435	1,425.4 sqft
Southwest-facing slope	1,193 sqft	4/12	x1.0426	1,243.8 sqft
Southeast-facing slope	1,160 sqft	4/12	x1.057	1,226.1 sqft
Southeast-facing slope	862 sqft	4/12	x1.0604	914.1 sqft
Northwest-facing slope	829 sqft	4/12	x1.0618	880.2 sqft
Northwest-facing slope	706 sqft	4/12	x1.0568	746.1 sqft

Footprint total: 6,116 sqft | Avg multiplier: 1.0 | Adjusted area: 6,118 sqft

Calculation Detail — Show Your Work

ITEM	FORMULA
Adjusted area (waste)	6,118 sqft x (1 + 12% waste) = 6,852.2 sqft
Shingle bundles	6,852.2 sqft / 33 sqft/bundle = 207.6 -> 208 bundles (ceiling)
Underlayment rolls	6,852.2 sqft / 400 sqft/roll = 17.13 -> 18 rolls (ceiling)
Ice & water shield	Eave 247 lnft x 3 ft protection band = 741 sqft
Drip edge	Eave perimeter = 247 lnft
Ridge cap	Ridge + hips = 48 lnft
Valley flashing	Valley length = 6 lnft
Roofing nails	61.2 squares x 2.5 lbs/sq = 153.0 -> 153 lbs (ceiling)
Labor (squares)	6,118 sqft / 100 = 61.2 squares
Sales tax	Subtotal \$26,145.75 x 8% = \$2,091.66

Google Solar API — Measurement Method

Roof measurements provided by the Google Solar API (buildingInsights endpoint). Google's Solar API uses high-resolution aerial imagery and machine learning to map individual roof segments with measured pitch, area, and orientation. Data covers 6 roof segment(s). Imagery date: 2017-05. Imagery quality: HIGH. Total roof area 6,118 sqft and pitch data are directly measured values, not estimates — no shadow inference required.

Note: Solar API data reflects the most recent available aerial imagery for this property. Linear measurements (eave, ridge, valley) are estimated from segment geometry. A licensed contractor should verify quantities during physical inspection.